


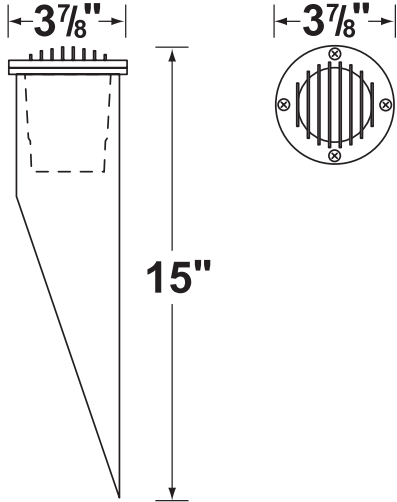




CL-303			
Product Specification Sheet			
HOUSING:	Die-cast aluminum fixture, mounted with tension clips inside a PVC sleeve, provides in-ground fixture support.	 <p style="text-align: center;">CL-303-VG</p>	 <p style="text-align: center;">CX-854 DIRECT BURIAL WIRENUT AVAILABLE</p>
FINISH:	Polyester UV powder coated fixtures, available in BK-Black . PVC sleeve available in black only. (<i>VG color is discontinued</i>)		
LENS:	Clear, tempered, and heat resistant glass with silicone gasket. See accessories & parts for special effect lenses, honeycomb louver and new frosted glass lens CX-380-FR.		
LAMP TYPE:	12V, MR-16 halogen, 50W max. See lamp guide for LED and color MR-16 lamps.		
MOUNTING:	In-ground direct burial or concrete encasement. Wire connector excluded.		 <p style="text-align: center;">CORONA Lighting</p> <p style="text-align: center;">WWW.CORONALIGHTING.COM </p> <p style="text-align: center;">Tel: 800-727-9262 213-747-4500</p> <p style="text-align: center;">Fax: 800-727-9957 213-747-3234</p>
WIRING:	Fixture is prewired with a 3-foot pigtail of direct burial cable.		

- Fixture is supplied with 20W MR-16 lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.
- When ordering, add the 2 letter color code to the end of the product number.