


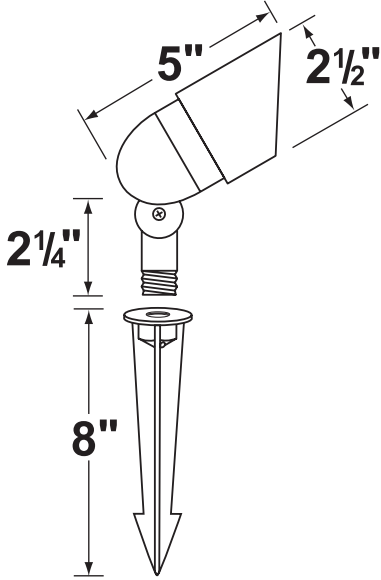



CL-505			
Product Specification Sheet			
HOUSING:	Die-cast aluminum. 360 degree rotatable shroud.	 <p>CL-505-GT</p>	 <p>CX-839 CORONA UNIVERSAL CONNECTOR AVAILABLE</p>
FINISH:	Polyester UV powder coated, available in GT-Granite , BK-Black , BZ-Bronze , RT-Rust , VG-Verde Green , WH-White .		
LENS:	Clear, tempered, and heat resistant glass with silicone gasket.		
	See accessories & parts for special effect lenses and honeycomb louver.		
LAMP TYPE:	12V, MR-16 halogen, 50W max. See lamp guide for LED and color MR-16 lamps.		 <p>CORONA Lighting</p> <p>WWW.CORONALIGHTING.COM</p> <p>Tel: 800-727-9262 213-747-4500</p> <p>Fax: 800-727-9957 213-747-3234</p>
MOUNTING:	Adjustable cast aluminum knuckle with 1/2" NPT, including ground spike. Wire connector excluded. See accessories & parts for optional mounting hardware.		
WIRING:	Fixture is prewired with a 3-foot pigtail of direct burial cable.		

- Fixture is supplied with 20W MR-16 lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.
- When ordering, add the 2 letter color code to the end of the product number.