

ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

1633 Staunton Ave Los Angeles, CA 90021

(800) 727-9957 (800) 727-9262 (213) 747-3234

(213) 747-4500 E-Mail: sales@coronalighting.com

³ Area Lights 3 Cast Brass

Fixture Specifications:

Housing: Brass shade, adjustable in height for light control.

Stem: Solid brass pipe with 1/2" NPT on bottom.

PRODUCT #: CL-649B-AB

Finish: AB- Antique Bronze. Natural toning process.

AB finish will vary due to artistic process.

Lens: Clear glass, cover over lamp providing sprinkler

water protection. Frosted lens available.

Socket: S.C. Bayonet socket, easy tool free lamp access.

Lamp: 12V, S.C. bayonet, 27W max. L-SCB-1141 (18w)

standard. LED lamps available in 1W - 3000k color temperature. Xenon and halogen lamps available.

Gasket: Silicone "O" ring gasket seals lens to socket housing

for water tight sealing.

Wiring: Fixture is prewired with a 18-2 direct burial

cord. Wire connector available seperately. Universal connector CX-839 or gel filled wire nut

CX-854 may be ordered to Corona Lighting.

Mounting Spike: Standard injection molded spike with 1/2" NPT


threaded female hub.

Electrical Notes: A remote 12V transformer required, may be

ordered to Corona Lighting seperately. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing and

stem against manufacturer's defects.

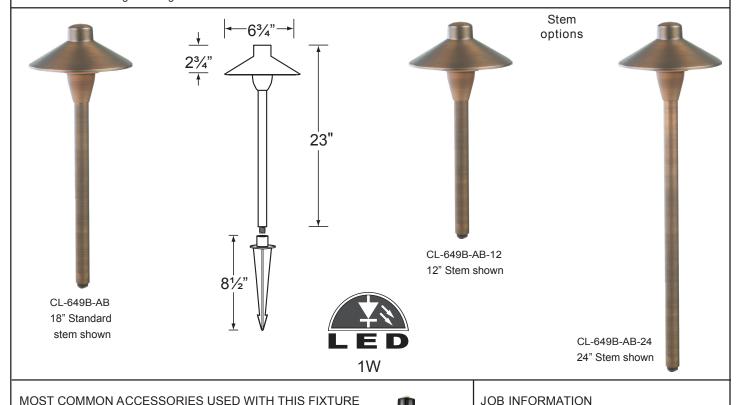







Mounting Canopy CX-709B-AB AB-Antique Bronze



Mounting Pedestal CX-603-BK BK - Black

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER: CONTRACTOR:

SPECIFIER: